



TECHNICAL SHEET

FA 10 110 00



Designation : Harness FIRE FREE


This harness has been designed to offer a perfect solution for workers doing welding at height. We recommend its use for: shipbuilding, building steelwork, ...

Attachment points: 1 dorsal D-Ring (A) ●, 2 chest attachment textile loops (A/2) ● for fall arrest.

Adaptability: Adjustable shoulder and thigh straps

Convenience: Static strength of the harness webbing has been tested after being exposed to the small molten metal splashes. Automatic buckles on thigh straps.

Compliance: Complies with the standards EN 361:2002, ISO 9150 : 1988 and ISO 15025 : 2005

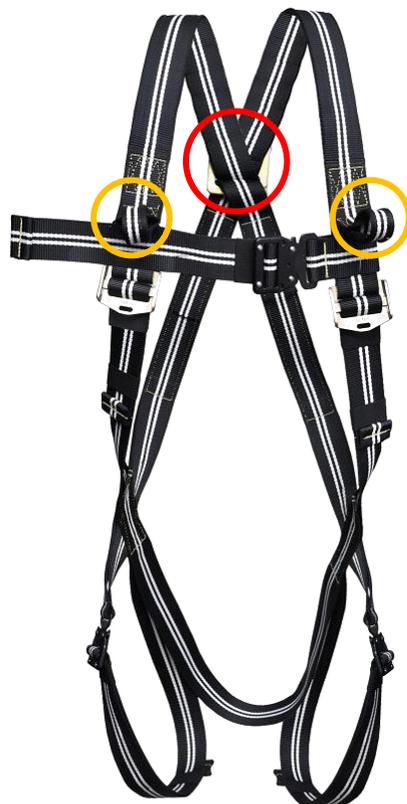

Size : S - XL

Materials :

Webbings : aramid

Buckles : steel



HS code

63072090

Carton Size / Pieces

60x40x48 / 08

Unit Weight

1.79 Kg

AET: N° Issue Extension

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering,
Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551

SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom



Maj. : 07/2013

ZI les portes du Dauphiné

4 rue de l'Aigue

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

