



# TECHNICAL SHEET






FA 20 400 10

**Designation:** Retractable Fall Arrester Olympe in wire rope

- Steel wire rope diam. 4.8 mm.
- Casing made up of high impact strength Polymer to prevent breakage and nearly indestructible.
- Swivel at the top and at the bottom of the device.
- Lateral carrying handle.
- Minimum breaking strength: > 12kN.
- Rubber protective snout for manipulating the cable.

**Connectors:** 1 screw-locking karabiner, opening 17 mm, ref. FA 50 101 17 et 1 snap hook with swivel and fall indicator, opening 21 mm.

**Compliance:** Conforms to EN360:2002.  
 Certified for a horizontal use when used with the lanyard ref. FA 40 304 15 connected to the wire rope of the block.

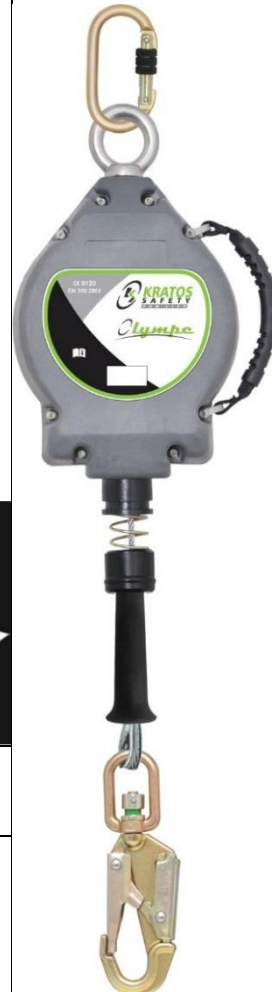

**Length:** 10 mtrs.

**Material of the components:**

Polymer casing: PA 6 30% fiberglass.  
 Wire rope: Galvanized steel.  
 Connectors: Steel.

HS code	Carton size / Pieces	Unit weight
84289090	60x40x24 / 4	4.38 Kg

**AET : N° 4023 Issue 4 Extension 2**  
 Satra Technology Centre, N°0321  
 Wyndham Way, Telford Way, Kettering,  
 Northamptonshire, NN16 8SD, United Kingdom.

**Article 11: GB07/73551**  
 SGS United Kingdom Ltd., N° 0120  
 Unit 202B, Worle Parkway,  
 Weston-super-Mare, BS22 6WA, United Kingdom



MAJ : 01/15

**ZI les portes du Dauphiné**  
 4 rue de l'Aigüe  
 69 780 St Pierre de Chandieu – France  
 Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32  
 www.kratossafety.com info@kratossafety.com

