

Temp-Sea 770

DESCRIPTION AND GENERAL PROPERTIES

- Material PVC
- Length (cm) 30
- Wrist Straight cuff
- Colour/Color Blue
- Interior finish Jersey support, lined with woolen fleece
- Exterior finish Pebbled
- Size / EAN 9 10
- Packaging 1 pair/bag - 48 pairs/carton
- Complementary information Guaranteed without silicone



PERFORMANCE RESULTS

Certification category 3

CE 0334



121




4221

Legends



MECHANICAL HAZARDS EN 388

PERFORMANCE LEVELS



LOW CHEMICAL PROTECTION EN 374



MICRO-ORGANISMS EN 374




RADIOACTIVE CONTAMINATION EN 421



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

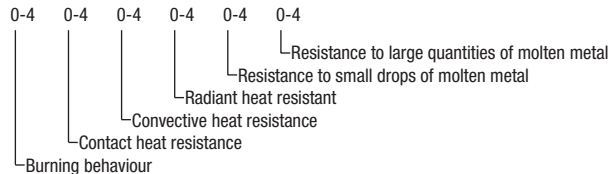


SPECIFIC CHEMICAL PROTECTION EN 374

Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%



COLD HAZARDS EN 511

PERFORMANCE LEVELS



For more details: www.mapa-pro.com

Temp-Sea 770

DESCRIPTION AND GENERAL PROPERTIES

- PVC specially designed for use in extreme cold (-30°C) whilst preserving the flexibility of the glove
- Good resistance to oils, greases and hydrocarbons

MAIN FIELDS OF USE

Fishing and Work at sea

- Handling produce

Food industry

- Maintenance and work in cold stores

Transport

- Handling of liquids at low temperatures (water, oil, hydrocarbons, etc.)

Other industries

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the "CE"-type tests.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www.mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Ensure the inside of the gloves is dry before putting them on again.
- Inspect the gloves for cracks or snags before reusing them.

Storage conditions

Store the gloves in their original packaging protected from humidity and heat.

Laundering conditions

Before taking off the gloves, clean them as appropriate :

- in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth
- in use with acids or alkalies : thoroughly rinse the gloves under running water and rub over with a dry cloth

Caution : improper use of the gloves or submitting them to a cleaning or laundering process which is not specifically recommended can alter their performance levels.

Drying conditions

Ensure the inside of the gloves is dry before putting them on again.

Food contact US

FDA 21CFR 177.2600

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product contains more than 0.1% of di ethyl hexyl phtalate according to the regulation n° 1907/2006 of the European parliament and of the Council concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH).

- CE-Type Examination Certificate

0075/014/162/04/07/0123

- Issued by the notified body nr

0075

C.T.C. – 4 rue Hermann Frenkel - F- 69367 LYON Cedex 07

- Quality assurance certificat

0334 Asqual 14 rue des Reculettes -F-75013 PARIS

MAPA[®]
PROFESSIONNEL

www.mapa-pro.com