

JALLE

REF 88.2.000

MULTI-PURPOSE SAFETY KNIFE 3 IN 1

Ideal for all handling work, open boxes and packaging.

SAFETY • Rear blade retractable using spring by releasing the slider.

No contact with the front blade while using the rear one.

PRACTICAL • Multi-purpose, impact resistant.



DELIVERED WITH TWO BLADES,
ONE WITH A ROUNDED EDGE



FOR RIGHT &
LEFT HANDED
USERS



LIGHT



AVOIDS
MSDs



ENHANCED
SECURITY



RESISTANT TO
DETERGENTS

1



SINCE
1904

TECHNICAL SHEET

MULTI-PURPOSE, IMPACT RESISTANT

SAFETY : BY RELEASING THE SLIDER, THE REAR BLADE AUTOMATICALLY RETURNS INTO THE KNIFE BODY.




THE PROS



DELIVERED WITH A BLADE REF 152A.6



AND A STRAIGHT BLADE TIN COATED REF 789.3T



EASY BLADE CHANGE WITHOUT TOOLS



HIGH CUT PRECISION

FUNCTIONS



For cutting single-groove cardboards



For cutting double-groove cardboards



For cutting packaging adhesives



For cutting plastic films



For cutting threads and strings



For cutting packaging links



For cutting flexible plastic films, PVB

MULTI-PURPOSE SAFETY KNIFE PLASTIC FILMS / PACKING STRAPS / CUTTING

TECHNICAL CHARACTERISTICS

- Reversible blade (152A.6).
- Impact resistant.
- Detergents and acetone resistant.
- Easy to use for right and left handed.

BLADE CHANGE


01/ To remove the rear blade, push the slider to the end.



02/ Keeping the slider pushed, unlock the blade by bringing the yellow lock button on the right.



03/ Carefully remove the blade. Turn the blade over or insert a new one. Release the lock.

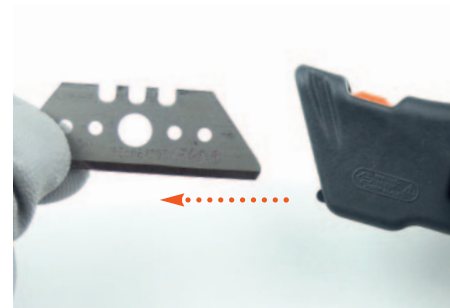

04/ Press the button.



05/ Remove the half-head, which releases the blade. No tools required.





06/ Carefully remove the blade. Follow steps in reverse for a new blade.






BLADES

DELIVERED WITH




OTHER COMPATIBLE BLADES



Blade Reference	Description	Type	Dimensions (in mm) Length • Width • Thickness	Sharpening Angle	Hardness
789.3T	Straight blade	Premium quality steel TIN covered	44 x 15 x 0,3	17° - 34°	63,0 Hrc
152A.6	Straight blade with a rounded edge	Premium quality steel	54 x 19 x 0,6	18° - 27°	63 Hrc
152.6	Straight blade	Premium quality steel	54 x 19 x 0,6	18° - 27°	63,0 Hrc
652A.6.2	Serrated straight blade with a rounded edge	Premium quality steel	54 x 19 x 0,6	15° - 28,5°	64,0 Hrc
652.6.2	Serrated straight blade	Premium quality steel	54 x 19 x 0,6	15° - 28,5°	63,0 Hrc

TECHNICAL SHEET (in mm)

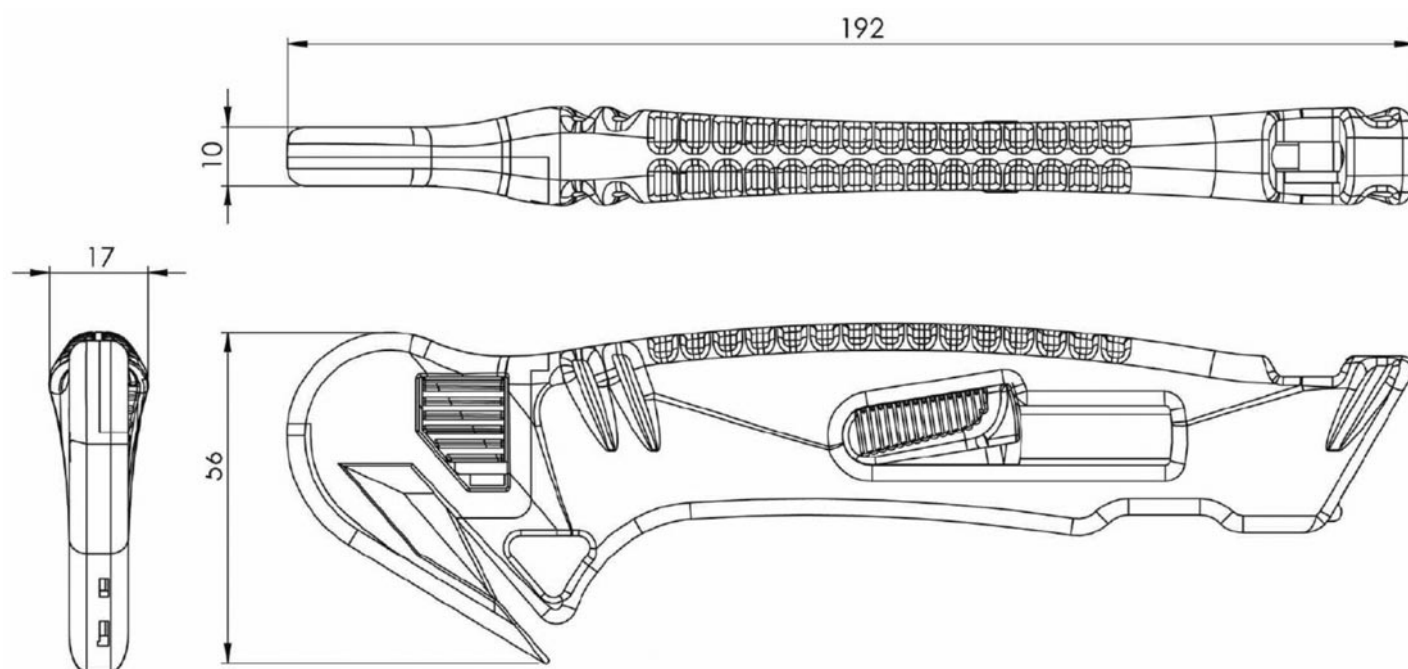

Packaging	Weight PKG	Dimensions (in mm) Length • Width • THK	Quantity PKG	Units	Accessories	Material	Color
SKIN PACK AND BOX	65 g	192 x 56 x 17	10	7 units	Body	PA6 GF30	Black
					Protective blade cover	PA6 GF30	Yellow
					Cursor + blade holder	PA6 GF30	Yellow
					Slider spring	Premium quality steel	Metallic
					Blade holder spring	Premium quality steel	Metallic
					Blade 152A.6	Premium quality steel	Metallic
					Blade 789.3T	Premium quality steel TIN covered	Metallic yellow

MP
MURE & PEYROT

MURE & PEYROT
25, rue Roger Touton • BP 50120
Parc d'Activités Bordeaux Nord
33041 BORDEAUX CEDEX - FRANCE

Tel.: +33 (0)556 693 200 / E-mail: mail@mure-peyrot.com

FOR MORE INFORMATION
MURE-PEYROT.COM